

Features


ALMACO is dedicated to providing only the best products possible. We are currently offering an all-new Seed Spector Sensor Pro, which includes the following enhancements:

- Windows CE-based operating system
- Also compatible with handheld computer with Windows OS
- 3.3X increase in data processing speed
- Selectable 9.6k or 19k baud rate
- Customized touch screen options
- Smaller version which will use the display/keyboard from handhelds or notebooks
- USB connection architecture to store data on-the-go
- Advanced manufacturing methods to produce highly-precise sample processing chambers
- Advanced methods of measuring test weight and density



New Seed Spector Sensor Pro

Remote mounted Sensor Pro allows you to control all your

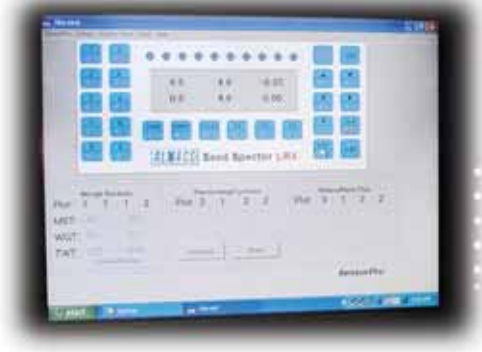

Touch Screen Computer and Sensor Pro Software

LCD Panel:	12.1" SVGA
Display Area (mm):	246 x 184.5
Video Interface:	VGA Compatible Analog RGB
Dimensions WxHxD (mm):	320x323x146
Net Weight (Kg)	4.8
Power Supply:	12V / 3.75A / 45W
Display Colors:	Dithering 16M

Many other configurations and options available

Benefits

- All the features of the LRX at the touch of your fingers
- Software can be ran on laptop with touchscreen or with a laptop tablet – no data transfer needed
- Coupled with the displayless LRX, fewer items needed in viewing range within the cab
- Larger viewable fonts
- More user interaction
- Allows for multiple viewers

